


FDU-160i

Advanced Frequency Distribution Amplifier

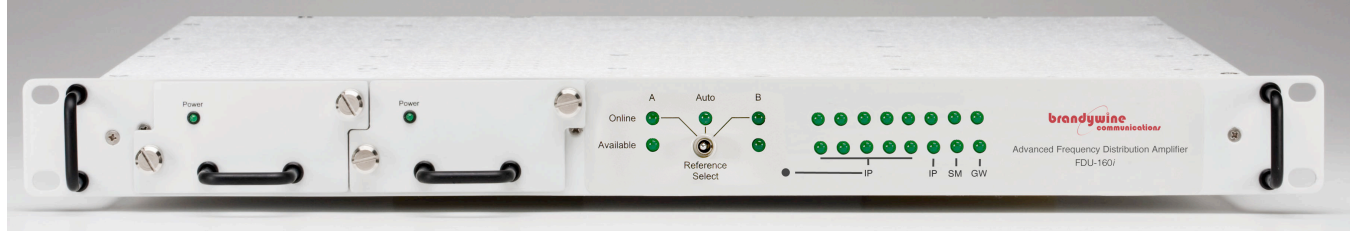

Features

- **Network Enabled Frequency Distribution Amplifier**
- **Dual Frequency Inputs with Auto Failover**
- **Low Phase Noise Reference Frequency Outputs**
- **Programmable per channel amplitude**
- **1U 19" rack mount**
- **Redundant Hot Swappable Power Supplies**
- **+15 dBm output**

The FDU-160i is a high performance signal distribution amplifier designed for use with Brandywine high precision time and frequency sources.

The FDU-160i is contained in a compact 1U rack-mount chassis. The FDU accepts two sets of inputs, comprising the reference frequency (5 MHz) and status from the source. The FDU provides automatic changeover should one of the on-line source inputs fail. Manual source select override is available on the front panel, or through the Ethernet interface.

A variety of status indicators are located on the front panel for instant visual feedback, together with manual controls for source selection.

A 10/100 base T Ethernet interface provides full control over the functionality of the system, including reference selection and output amplitude (on a per channel basis).

User control of the unit is via a built-in Web Browser with user-friendly graphical interface, or via SNMP for system applications.

Applications for the FDU-160i include secure communications systems, satellite ground stations, digital television broadcasting and any system requiring highly reliable frequency outputs.

FDU-160i Specifications

Frequency Inputs

Frequency	5 MHz, +/- 5PPM
Amplitude & Impedance	.5 _{min} 1.0 _{max} V _{RMS} 50Ω
Isolation	Transformer coupled

Number of Inputs	2
Connector Type	BNC
Input Selection	Manual, Auto

Fault Inputs

Number of Inputs	2
Signal Type	TTL
Active Level	Selectable for active high or low
Action	Forces on-line changeover

Frequency Outputs

Number of Outputs	16
Frequency	Same as Input 5MHz (std), +6 dBm to +16dBm
Output Level	+6dBm +0dBm/-2dBm
Lower limit	+16dBm +2dBm/-1dBm
Upper limit	±2.0dBm
Set accuracy between limits	

Connector Type	BNC
Harmonic Distortion	-40 dBc
Cross Talk	-80 dBc
Spurious	-80 dBc
Additive Phase Noise@ 5 MHz**	
1Hz	TBD
10 Hz	TBD
100 Hz	TBD
1 kHz	TBD
>10 kHz	TBD

Specification valid when levels are set to +15 dBm

Network Interface

Interface Type	10/100 base T
Protocols	HTTP, DHCP, SNMP V2c, IPV4
Connector	RJ45

Console Port

Interface Type	RS232
Parameters	115200, N, 8, 1
Connector	DB9

Display

Display Type	16 bicolor LED
Functions	Output status, Ethernet settings

Status Output (Alarm)

Type	Dry relay form C contacts Ethernet SNMP trap
Alarm Function	Summary of all input/output alarms (relay) Individual input, output, power (Ethernet)

Power

Redundancy	Dual redundant Single supply maintains complete unit
Voltage	90-240 VAC 50/60Hz (std) 18-36V DC Optional 36-72VDC Optional
Power Consumption	<15W

Environmental and Safety

Temperature	
Operating	-10 to +55°C non condensing
Storage	-40 to +85°C
Product Safety	EN60950-1: 2006 + A11:2009 +A1:2010 A12:2011
EMC	EN55022 Class A EN50082-2 FCC Chapter 15 Class A

Ordering Information

Advanced Frequency Distribution Amplifier	
Basic Unit Includes Dual AC Power Supplies	
022051002	2 i/p 5MHz, 16 output 5MHz +15 dBm
Power Options (order separately)	
022060001	Substitute 18-36 DC power for AC
022060002	Substitute 36-72 DC power for AC

The FDU-160i may be used with many of Brandywine's precision frequency sources such as the RG 2111 for distribution of precision frequency outputs.
RG 2111 part number 001-0230

* No Auto-switch applicable to 022050004

** Not applicable to 022050005

© Brandywine Communications 2012